

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 September 2005 (15.09.2005)

PCT

(10) International Publication Number
WO 2005/085551 A1

(51) International Patent Classification⁷: **E04F 15/02**

(21) International Application Number:
PCT/IT2005/000119

(22) International Filing Date: 3 March 2005 (03.03.2005)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
RM2004U000035 5 March 2004 (05.03.2004) IT

(71) Applicant and

(72) Inventor: RAINERI, Gabriele [IT/IT]; Via Giuseppe Bonaventura, 3, I-95036 Randazzo (CT) (IT).

(74) Agent: FEZZARDI, Antonio; Studio Ferrario, Via Collina, 36, I-00187 Roma (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PANEL WITH PRE-PLACED TILES FOR LAYING FLOORS

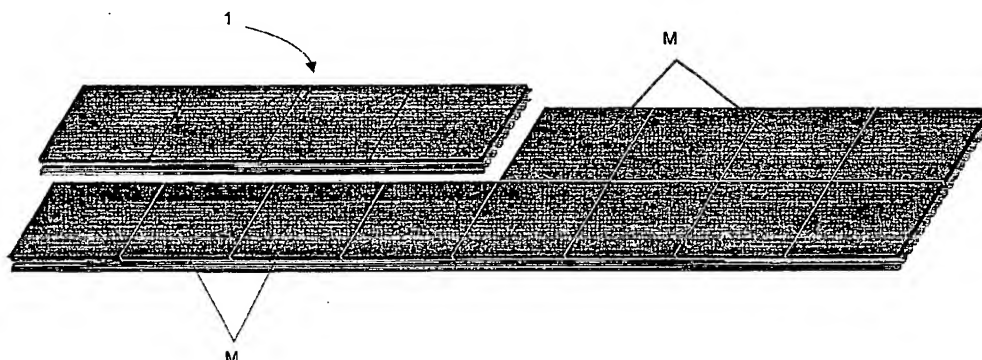

(57) Abstract: A panel (1) for laying floors, characterized in that it includes two or more tiles (M) and a membrane provided with engagement projections on both its faces to which said tiles are secured beforehand in the correct position for their lying.

BEST AVAILABLE COPY

WO 2005/085551 A1